


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.  
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.  
 Customer to confirm current revision of drawing prior to ordering.

40 x 5 Mild Steel Flat c/w 2 x 27 Ø HOLES @ 525 mm Centres

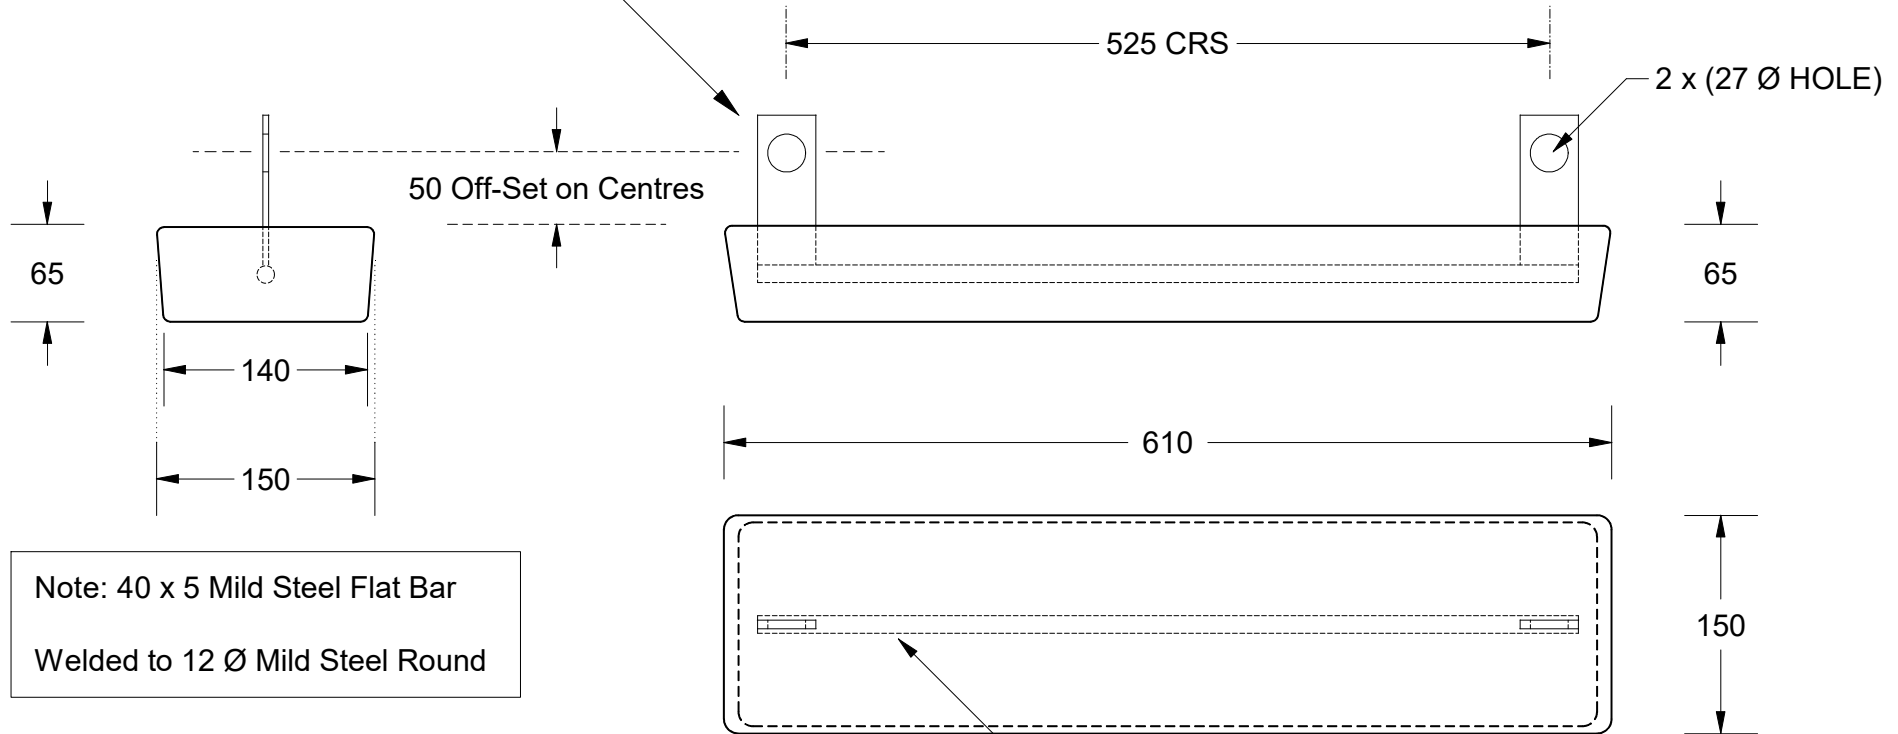

Note: 40 x 5 Mild Steel Flat Bar  
 Welded to 12 Ø Mild Steel Round

12 Ø Mild Steel Round located Centrally


Chemical Composition Limits			Alloy: <b>A1</b>
Standard: AS2239 (Most current revision)			
Aluminium			
Element	min.	max.	
Zinc	2.1	2.7	
Indium	0.017	0.025	
Cadmium	0.008	0.012	
Silicon	-	0.20	
Iron	-	0.12	
Copper	-	0.006	
Other Impurities			
- each	-	0.02	
- total	-	0.05	
Aluminium	remainder		

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
  2. All sharp edges removed for safe handling
  3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	For Quotation	13 November 2013	R.N.	J.L.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
<b>15.0</b>	<b>15.8</b>



cathodicanodes.com.au

Product <b>Aluminium Anode</b>		Scale <b>1 : 5</b>	
Part no. <b>CDA-15S Type 2</b>		Rev <b>1</b>	Sheet <b>1 of 1</b>
Drawing No: <b>CD3692</b>		Drawn by: R Northey Date: 13 NOV 2013	
Mould No: X		Tooling:	

All dimensions are in mm (nominal)