


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.



Alloy Compositions Standard: AS2239 Aluminium (Most current revision)	Alloy: A1		Alloy: A6	
	Min	Max	Min	Max
Zinc	2.1	2.7	2.0	6.0
Indium	0.017	0.025	0.01	0.02
Cadmium	0.008	0.012	—	0.005
Silicon	—	0.20	0.08	0.12
Iron	—	0.12	—	0.12
Magnesium	—	0.02	—	0.02
Titanium	—	0.02	—	0.02
Copper	—	0.006	—	0.006
Tin	—	0.02	—	0.02
Other Impurities	- Each 0.02		- Each 0.02	
Aluminium	- Total 0.05 remainder		- Total 0.05 remainder	

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications

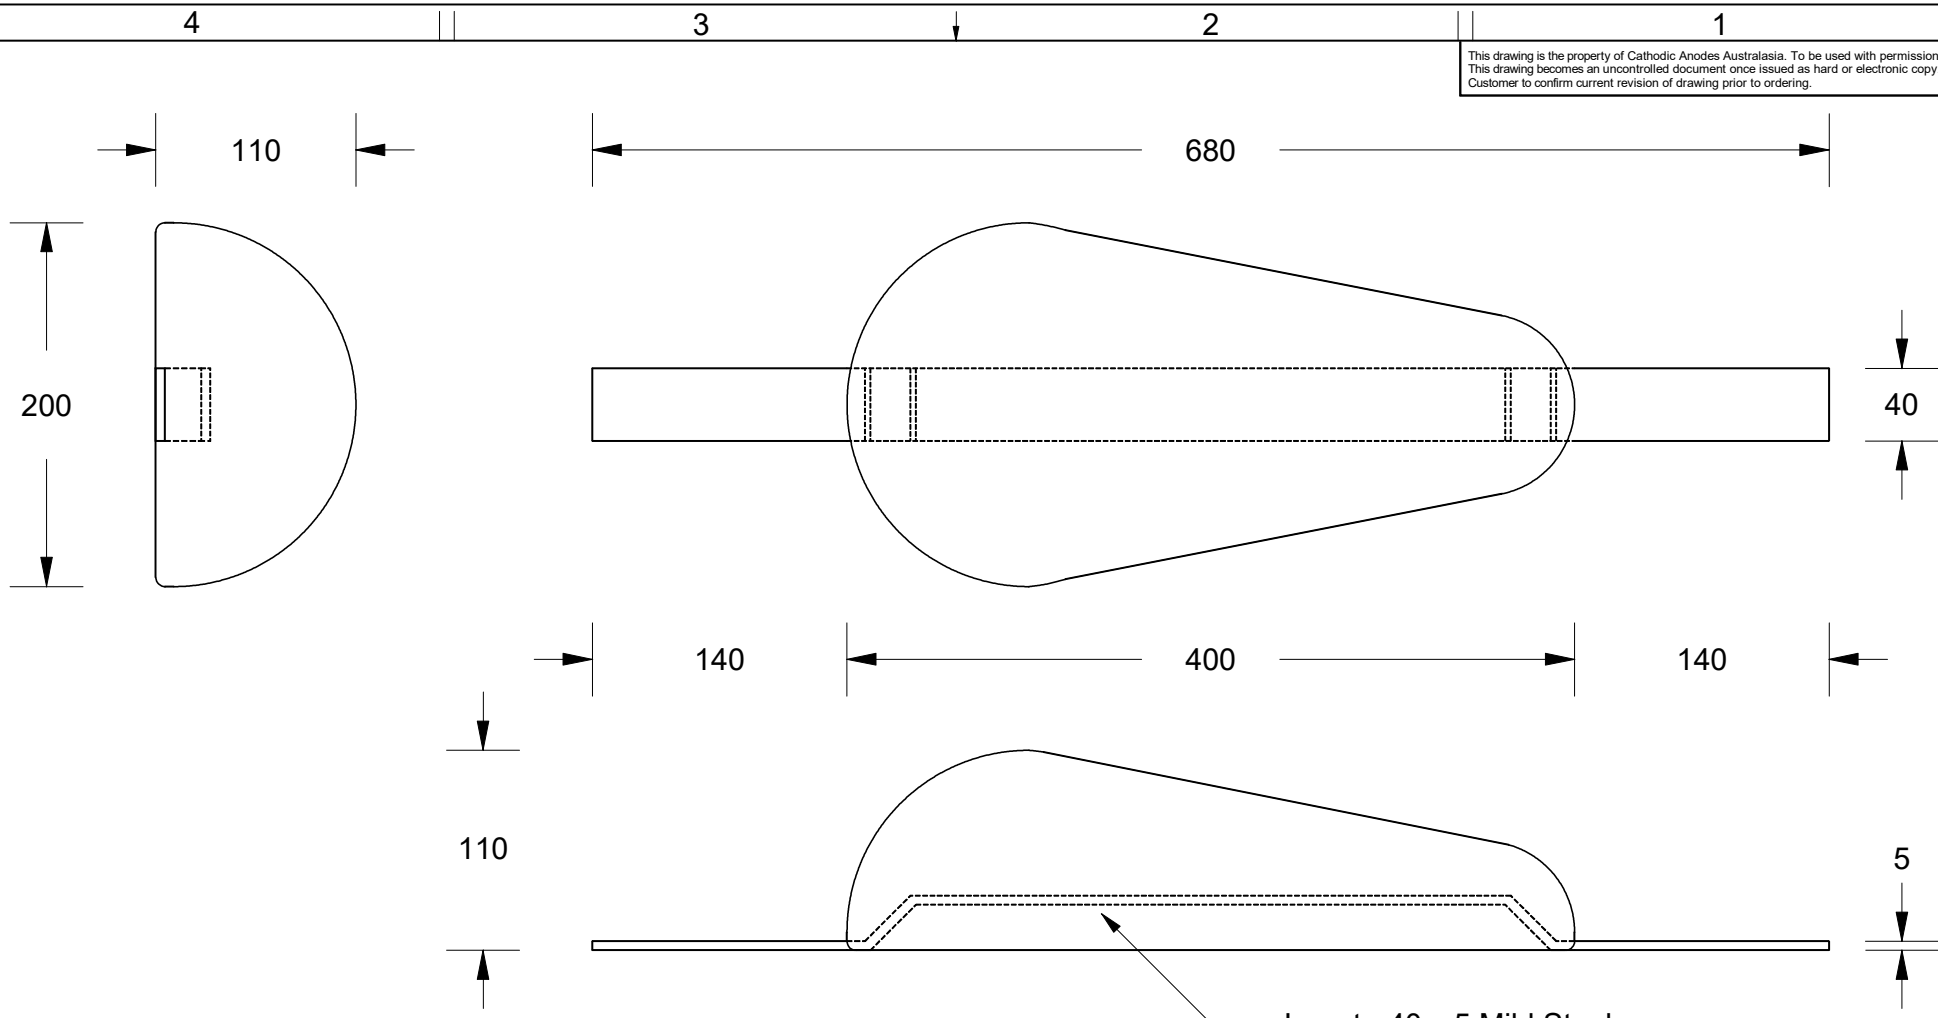

All dimensions are in mm (nominal)

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)	
12.0	13.1	
Date	Drawn	Verified
29 October 2014	R.N.	J.L.
Rev	Details of Change(s)	
1	For Manufacture	

CAA
Cathodic Anodes Australasia
cathodicanodes.com.au

Product Aluminium Anode	
Part no. CDA3-16S	Scale 1 : 4
Drawing No: CD3882	Rev 1
Sheet 1 of 1	Drawn by: R Northey Date: 29 OCT 2014

