


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.

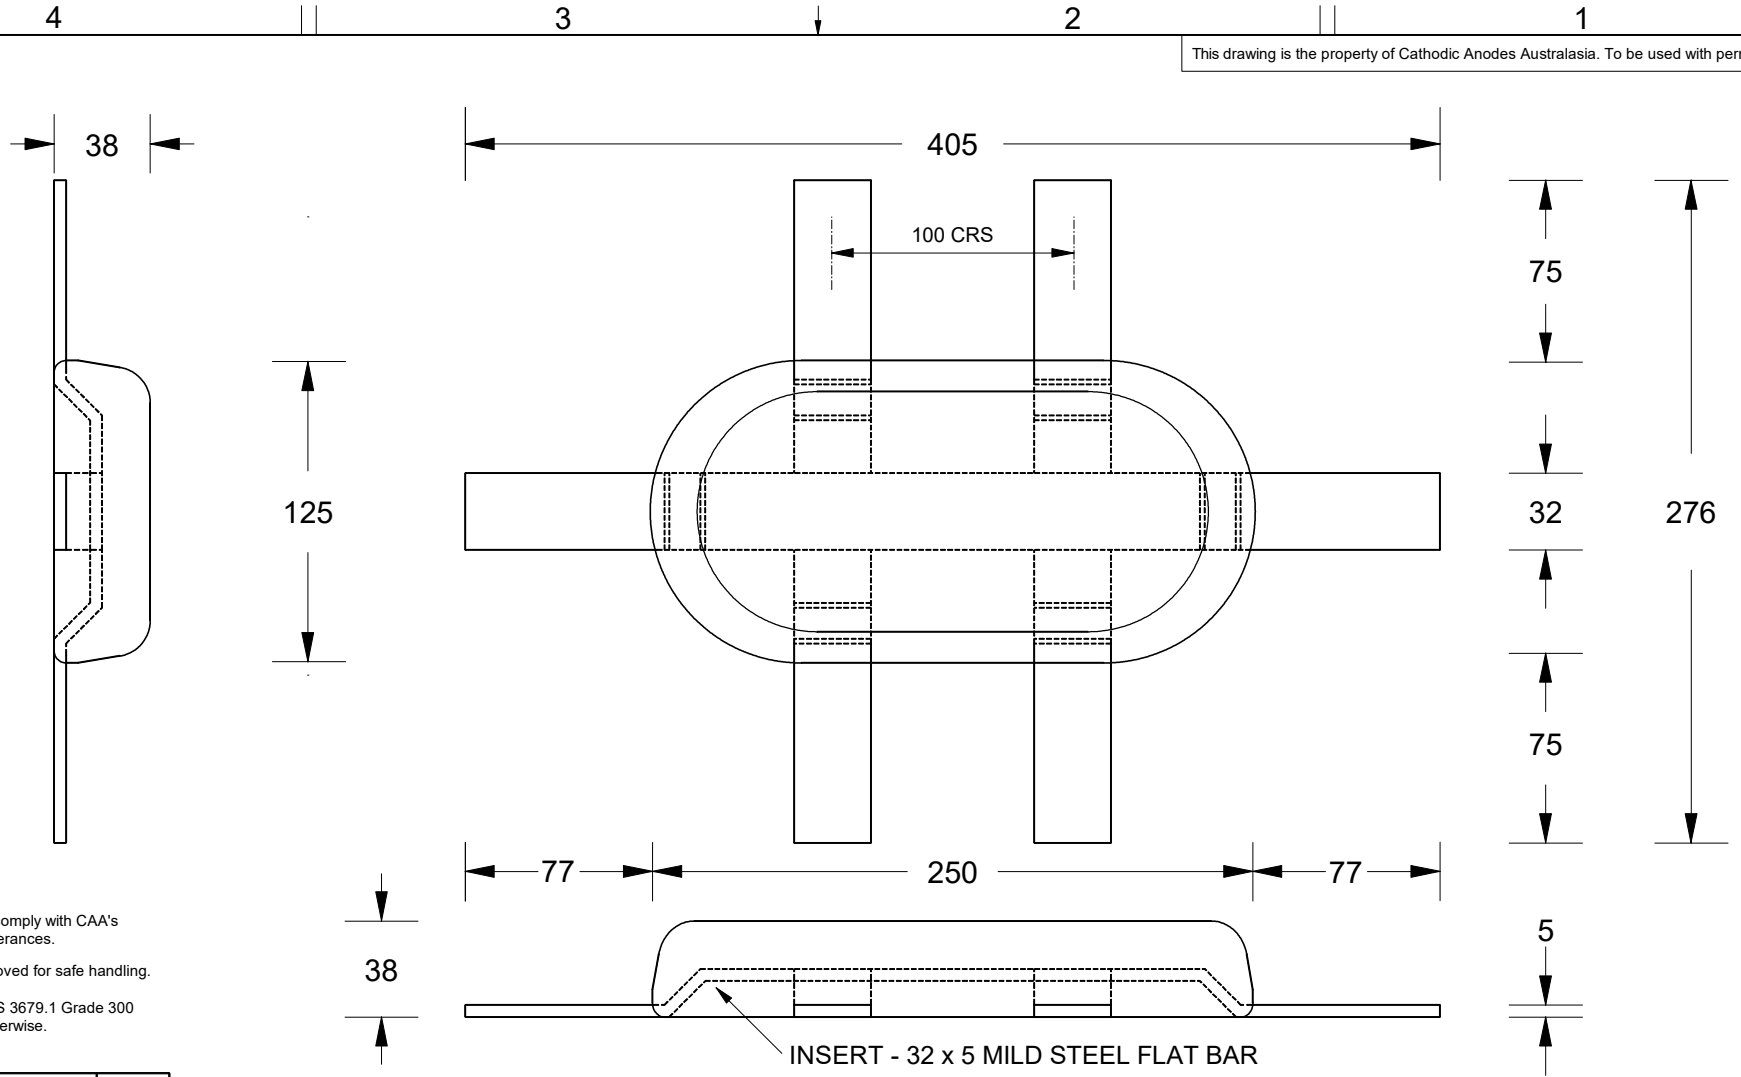

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances.
2. All sharp edges removed for safe handling.
3. Insert Steel - AS/NZS 3679.1 Grade 300 unless specified otherwise.

Chemical Composition Limits Standard: AS2239*			Alloy: <b>Z1</b>
Element	Min	Max	
Cadmium	0.025	0.070	
Aluminium	0.10	0.50	
Silicon	—	0.005	
Copper	—	0.005	
Iron	—	0.005	
Lead	—	0.006	
Other Impurities	- Each	0.005	
	- Total	0.02	
Zinc		remainder	

\* Corresponds to MIL-A-18001k alloy composition.

INSERT - 32 x 5 MILD STEEL FLAT BAR

All dimensions are in mm (nominal)

		Nett Weight Kg (nominal)	Gross Weight Kg (nominal)		Product <b>Zinc Anode</b>	
		<b>6.25</b>	<b>7.25</b>		Part no. <b>CDZ8-10S (6 Leg)</b>	
		Date 25 FEB 15	Drawn R.N.	Verified J.L.	Scale <b>1 : 3</b>	
Rev	Details of Change(s)				Drawing No:	<b>CD3928</b>
1	For Quotation				Rev	Sheet
					<b>1</b>	<b>1 of 1</b>
					Drawn by: R Northey Date: 25 FEB 2015	
					Mould No: 88 (Custom) Strap Sample 02 (Custom)	



Cathodic Anodes Australasia

[cathodicanodes.com.au](http://cathodicanodes.com.au)

