


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

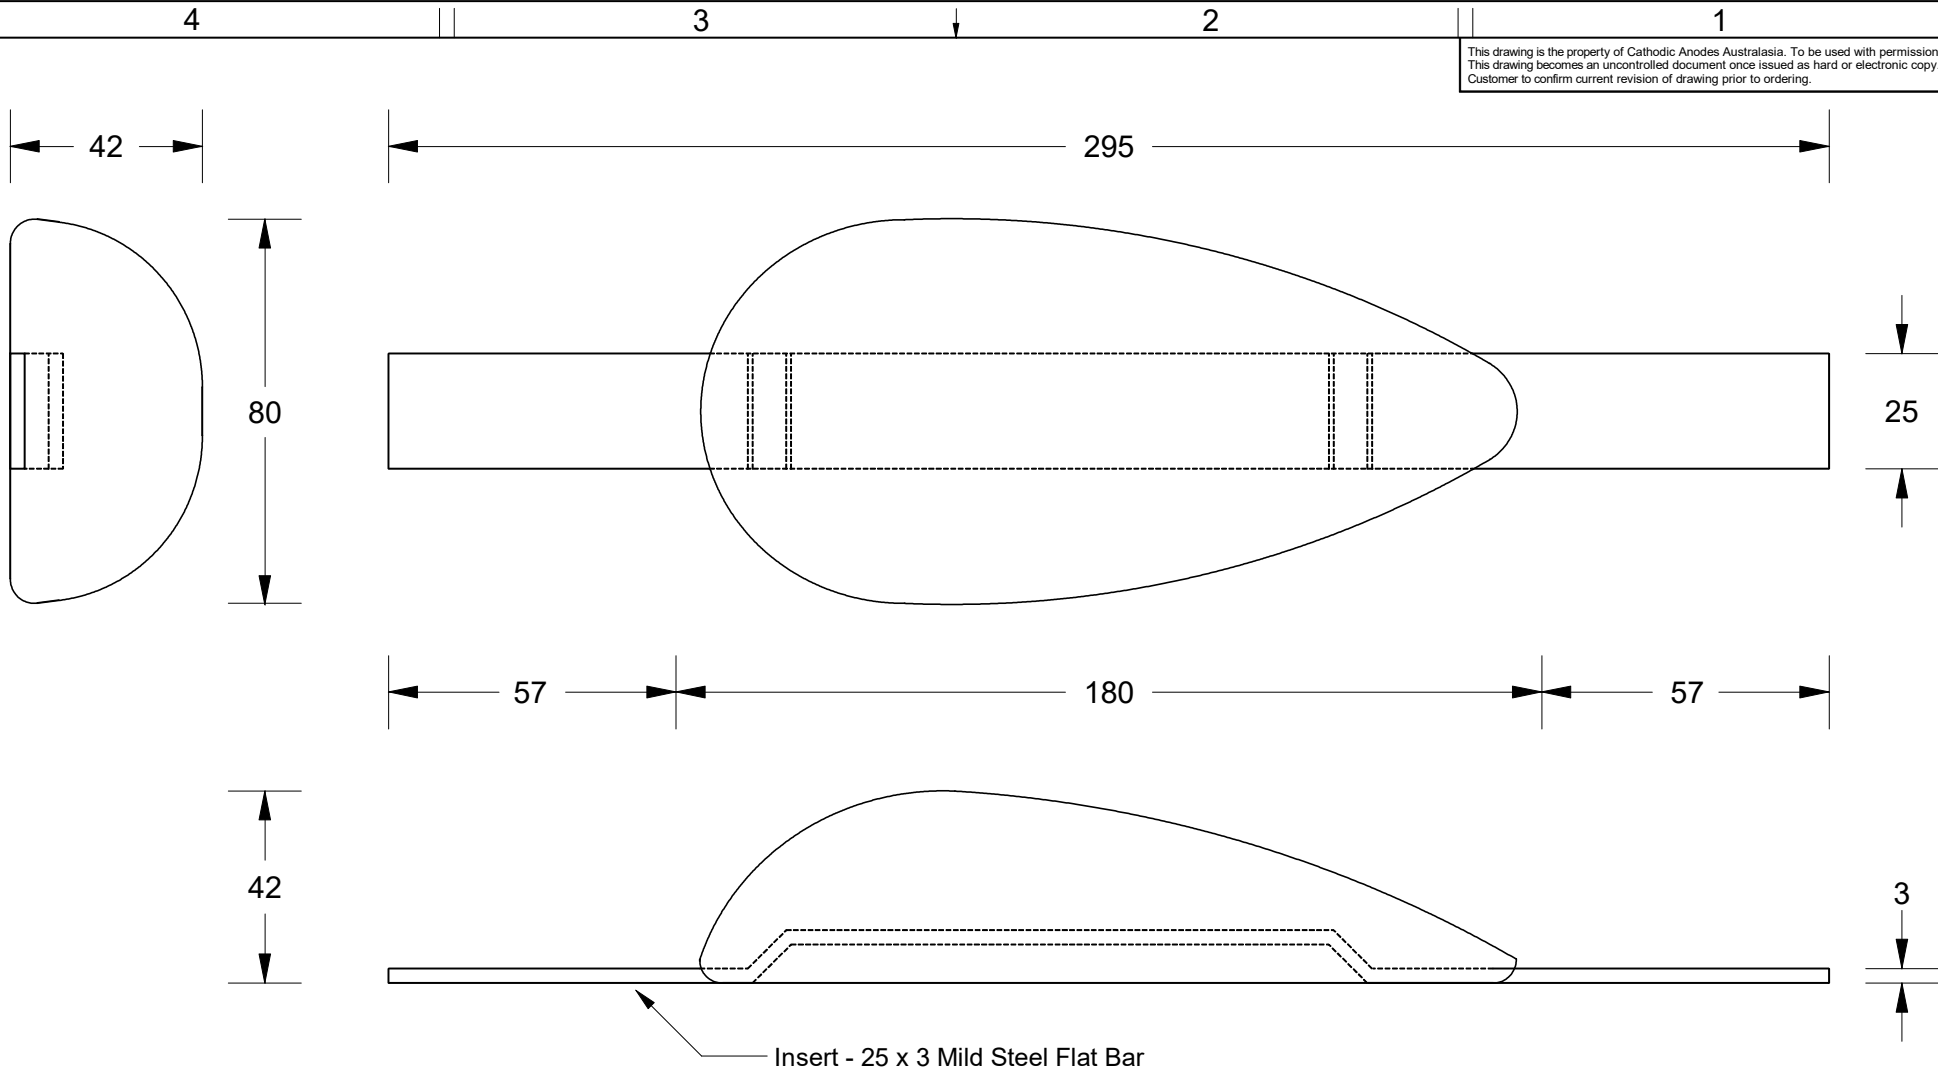

Insert - 25 x 3 Mild Steel Flat Bar

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications

All dimensions are in mm (nominal)

Alloy Compositions Standard: AS2239 Aluminium (nominal)	Alloy: A1		Alloy: A6	
	Min	Max	Min	Max
Zinc	2.1	2.7	2.0	6.0
Indium	0.017	0.025	0.01	0.02
Cadmium	0.008	0.012	---	0.005
Silicon	---	0.20	0.08	0.12
Iron	---	0.12	---	0.12
Magnesium	---	0.02	---	0.02
Titanium	---	0.02	---	0.02
Copper	---	0.006	---	0.006
Tin	---	0.02	---	0.02
Other Impurities	Each	0.02	Each	0.02
Aluminium	Total	0.05 remainder	Total	0.05 remainder



Rev	Details of Change(s)	Date	Drawn	Verified
1	For Manufacture	09 April 2015	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
0.8	1.0



Cathodic Anodes Australasia

cathodicanodes.com.au

Product Aluminium Anode		Scale 1 : 1.5	
Part no. CDA-1S Type 3		Rev 1	Sheet 1 of 1
Drawing No: CD3948			
Drawn by: R Northey Date: 09 APR 2015			
Mould No: 74	Strap Sample: 25x3 Black		

