


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

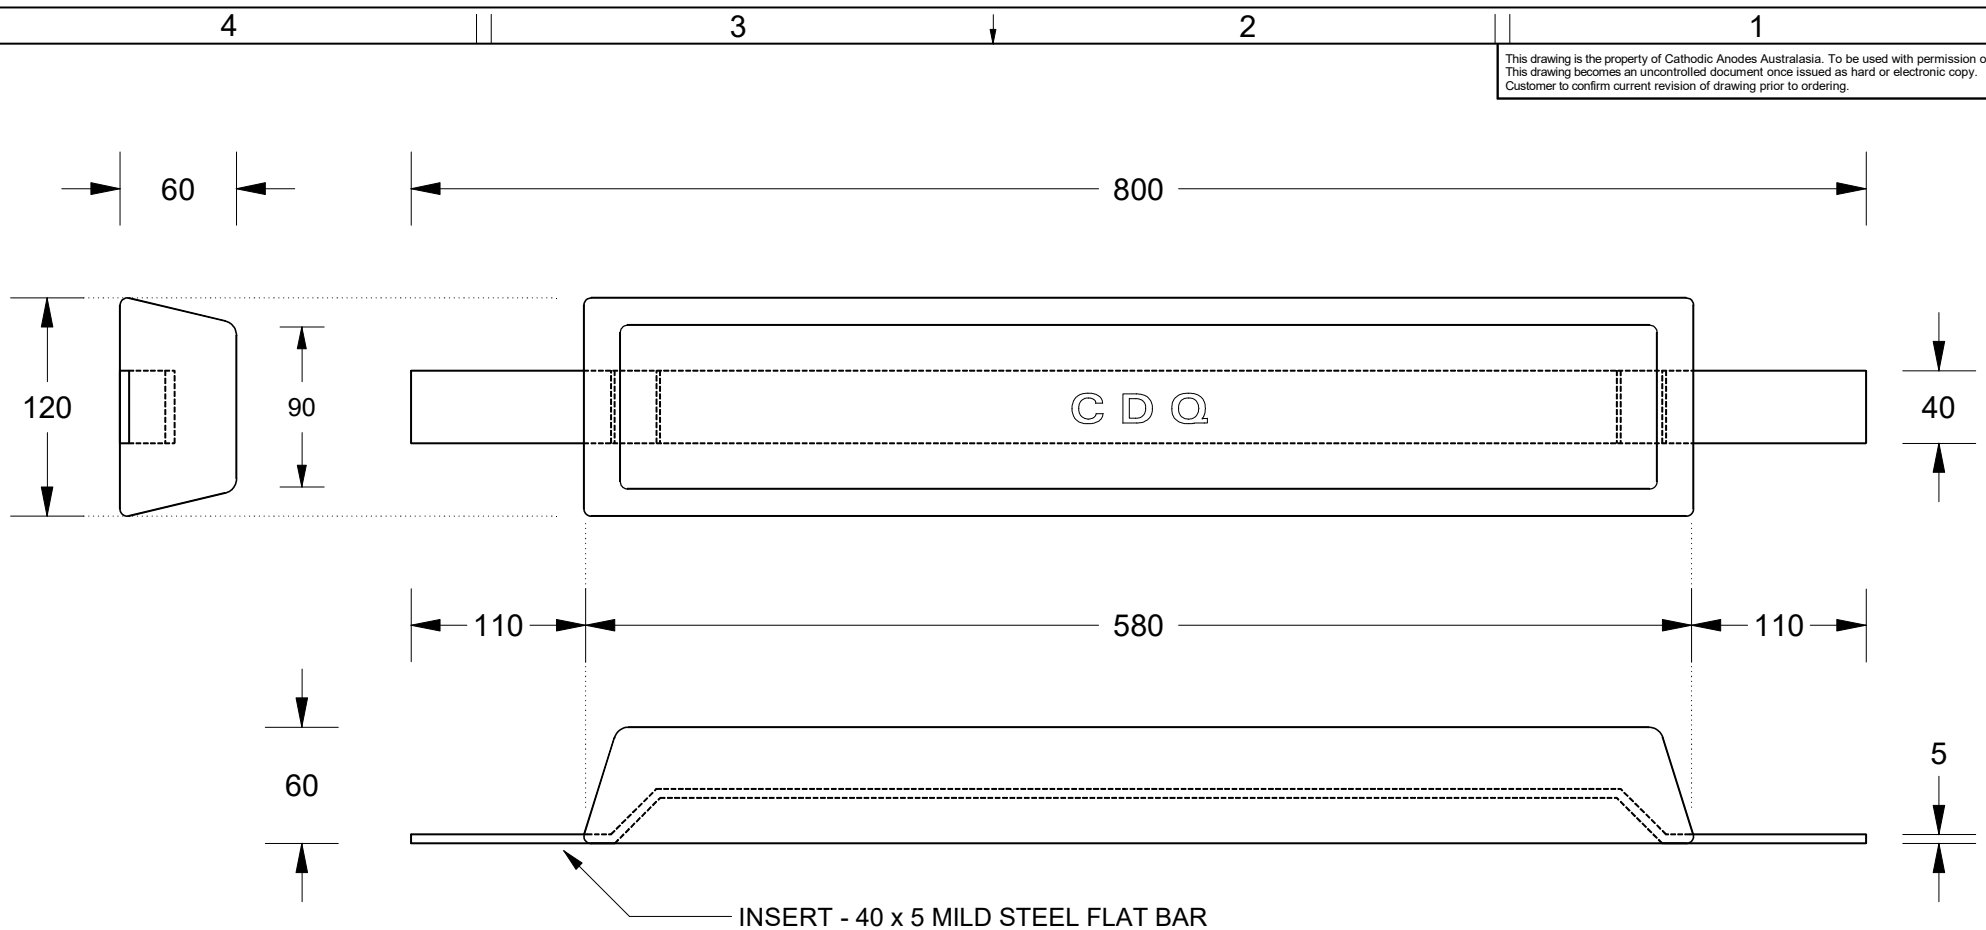

INSERT - 40 x 5 MILD STEEL FLAT BAR

CDQ
 CAST INDENTATION LETTERING

All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy: A1
Standard: AS2239 (Most current revision)			
Aluminium			
Element	min.	max.	
Zinc	2.1	2.7	
Indium	0.017	0.025	
Cadmium	0.008	0.012	
Silicon	-	0.20	
Iron	-	0.12	
Copper	-	0.006	
Other Impurities			
- each	-	0.02	
- total	-	0.05	
Aluminium	remainder		

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications



Nett Weight Kg (nominal)	Gross Weight Kg (nominal)			
9.0	10.2			
Rev	Details of Change(s)	Date	Drawn	Verified
1	For Manufacture	22 JUN 15	R.N.	J.L.

CAA
 Cathodic Anodes Australasia
 cathodicanodes.com.au

Product Aluminium Anode			
Part no. CDA-10S Type 2 (A1)	Scale 1 : 4		
Drawing No: CD3973	Rev 1	Sheet 1 of 1	
Drawn by: R Northey	Date: 22 JUN 2015		
Mould No: 10	Strap Sample 08		

D
C
B
A

D
C
B
A

4 3 2 1