


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

NO SHARP EDGES

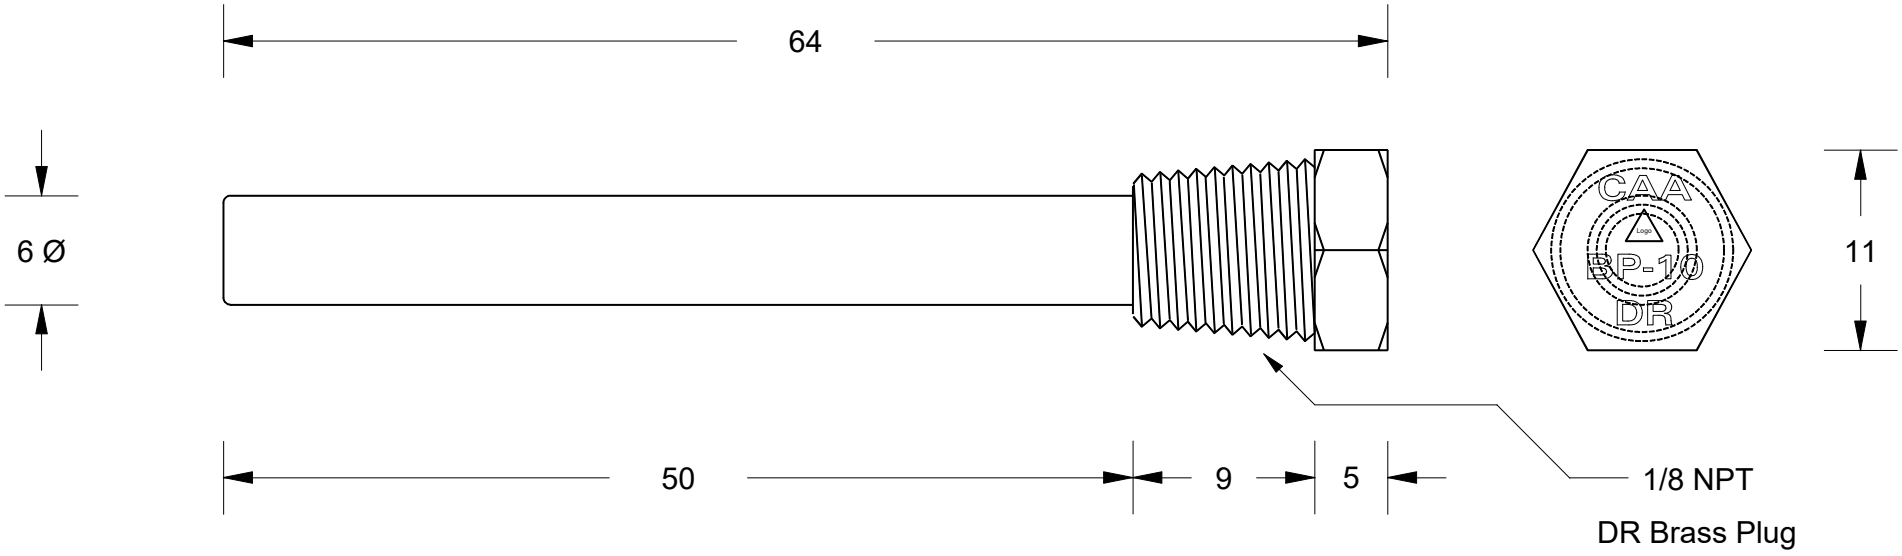

Note: DR Brass Plug = (DeZincification Resistant Brass)

Components Not Manufactured At CAA

Not Available As Separate Components

Chemical Composition Limits			Alloy: Z1
Standard: AS2239* (Most current revision)			
Element	min.	max.	
Zinc			
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc		remainder	

* Corresponds to MIL-DTL-18001L alloy composition

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications

Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	15 July 2011	B.L.	R.G.
2	2013 Catalogue Version (CAA Logo)	07 April 2015	R.N.	R.G.
3	Slight Anode Change - Square End	19 March 2018	R.N.	R.G.
4	Stamping & Logo added to DR Brass Plug	24 Feb 2022	B.G.	

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
0.010	0.020



cathodicanodes.com.au

Product Zinc Anode & DR Brass Plug		Scale 2.5 : 1	
Part no. CDZ9-063		Rev 4	Sheet 1 of 1
Drawing No: CDQ-153		Date: 19 MAR2018	
Drawn by: R Northey		Date: 19 MAR2018	

All dimensions are in mm (nominal)