


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

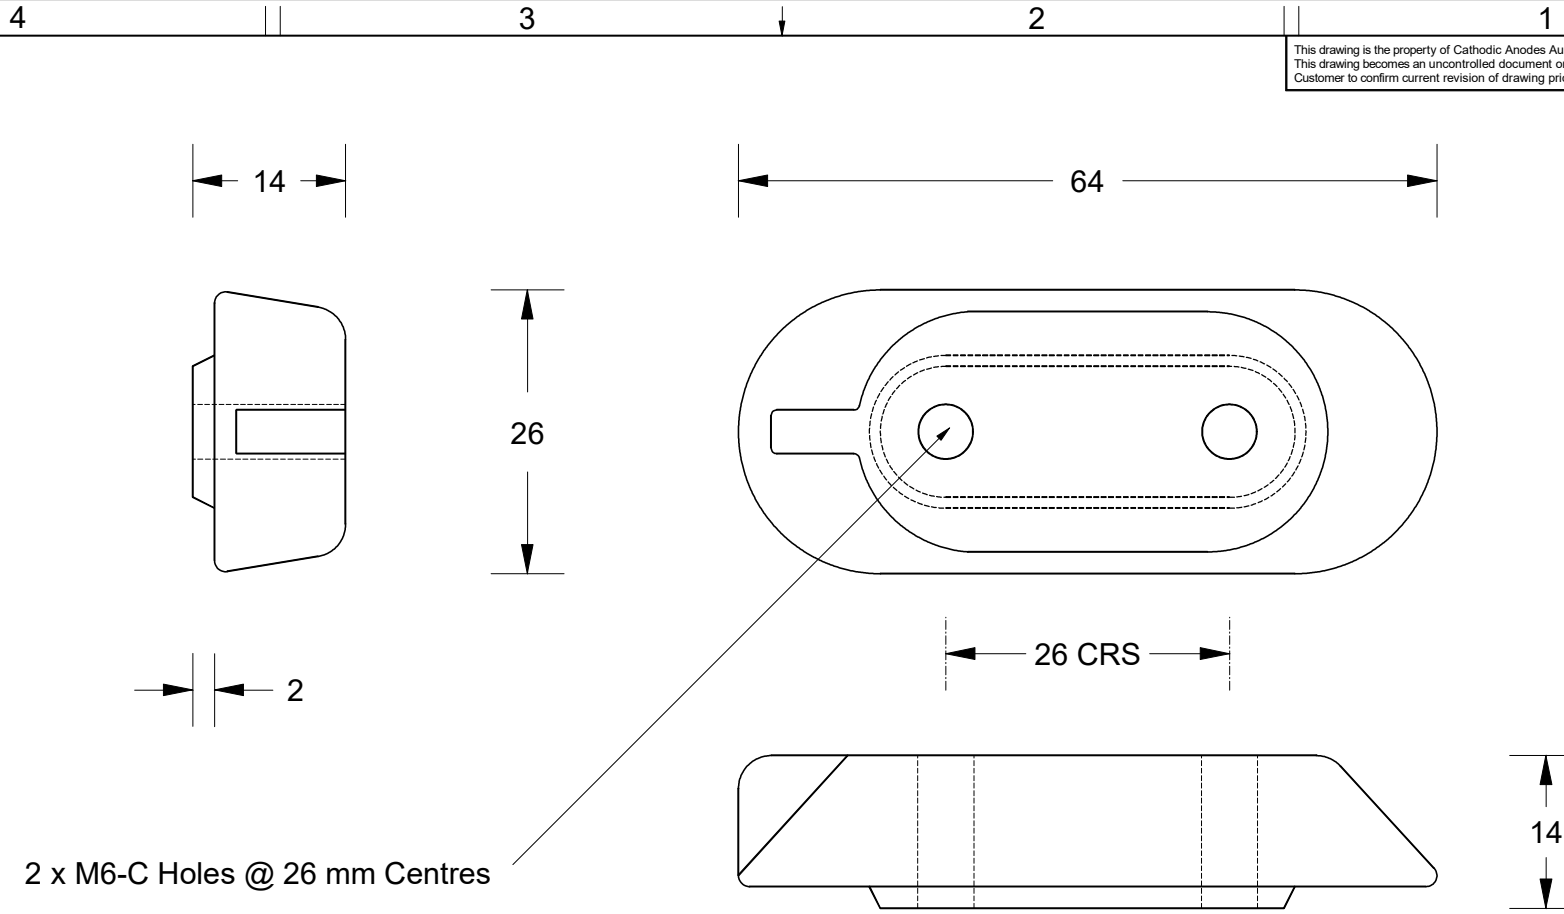

2 x M6-C Holes @ 26 mm Centres

Yamaha Transom Anode - Replaces Genuine Part No: 6EO-45251-11

All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy: Z1
Standard: AS2239* (Most current revision)			
Zinc			
Element	min.	max.	
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc	remainder		

* Corresponds to MIL-DTL-18001L alloy composition

Notes

- Anodes are cast to comply with CAA's standard casting tolerances
- All sharp edges removed for safe handling
- Anode insert material to meet relevant Australian/International specifications

Rev	Details of Change(s)	Date	Drawn	Verified
1	Initial Drawing - 2013 Catalogue Version	15 March 2016	R.N.	R.G.
2	2 x 5.5 Ø Holes > 2 x M6-C Holes	17 Dec 2019	R.N.	L.S.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
N/A	0.092



Cathodic Anodes Australasia

cathodicanodes.com.au

Product Transom Zinc Anode			
Part no. CDZ9 - 177		Scale 1.5 : 1	
Drawing No: CD3396		Rev 2	Sheet 1 of 1
Drawn by: R Northey		Date: 17 DEC 2019	