


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.

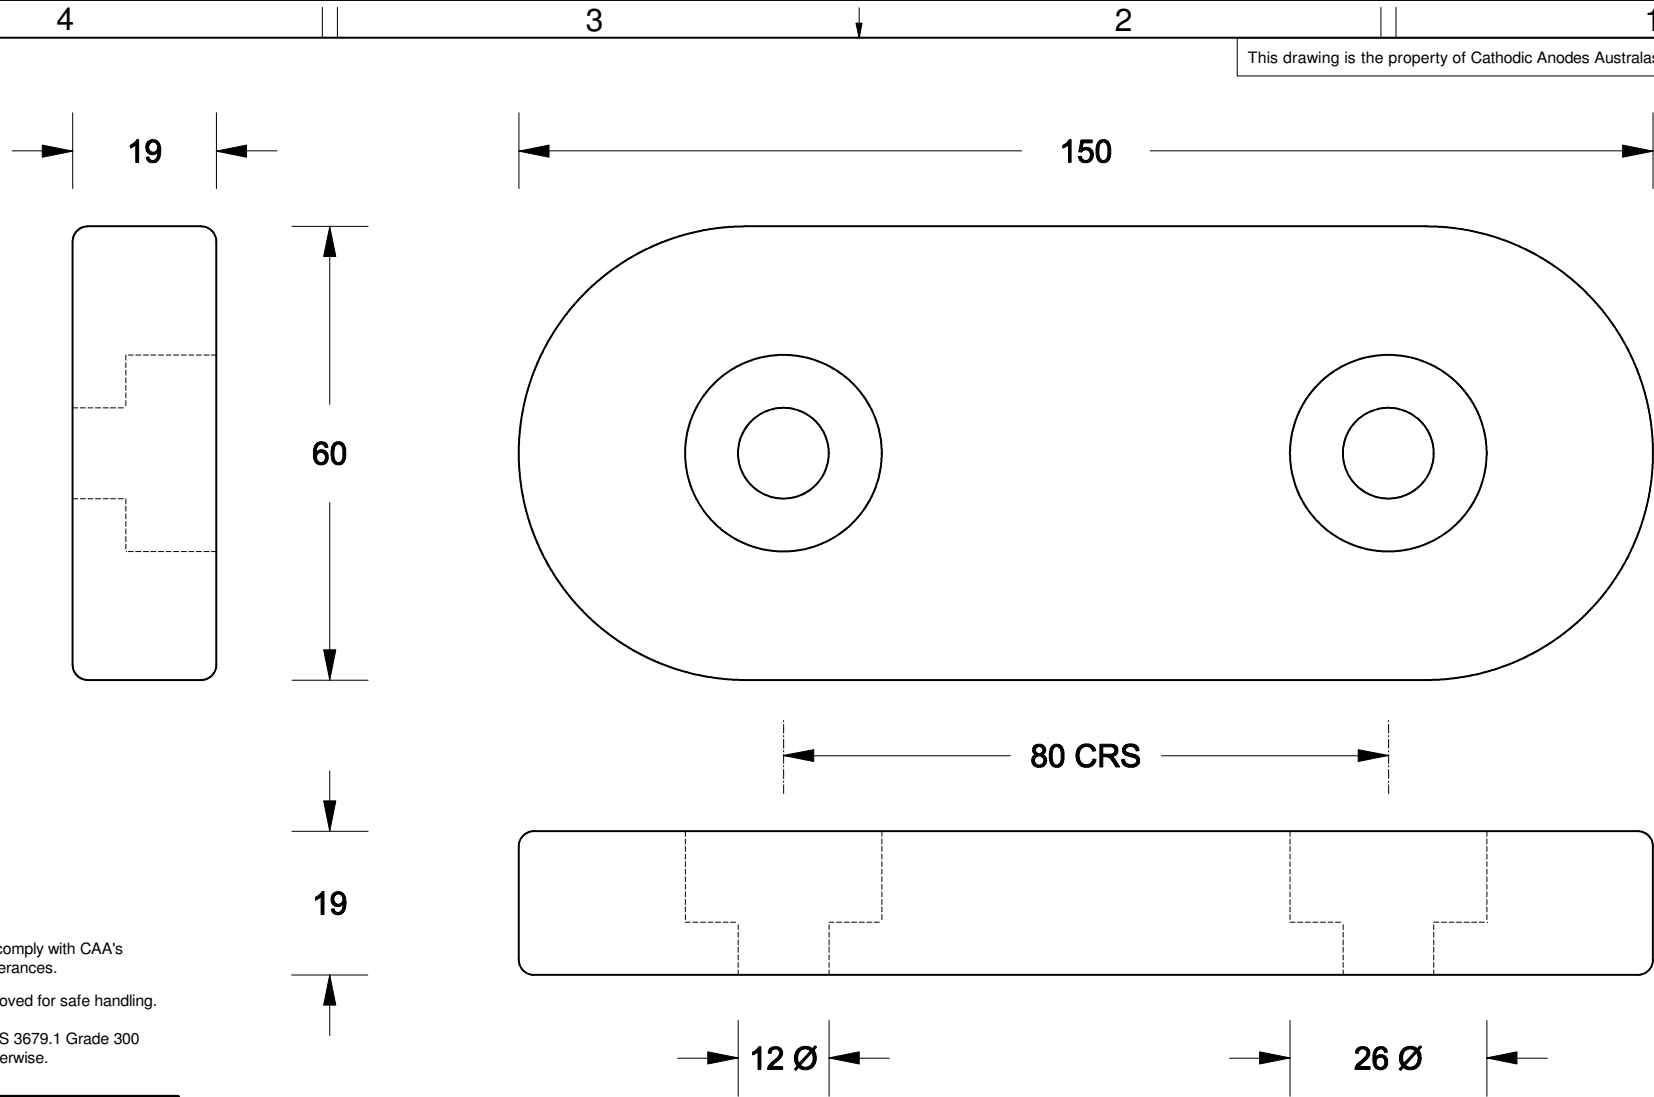

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances.
2. All sharp edges removed for safe handling.
3. Insert Steel - AS/NZS 3679.1 Grade 300 unless specified otherwise.

Chemical Composition Limits Standard: AS2239*		Alloy: Z1	
Element	Min	Max	
Cadmium	0.025	0.070	
Aluminium	0.10	0.50	
Silicon	—	0.005	
Copper	—	0.005	
Iron	—	0.005	
Lead	—	0.006	
Other Impurities	- Each	0.005	
	- Total	0.02	
Zinc		remainder	

* Corresponds to MIL-A-18001k alloy composition.

All dimensions are in mm (nominal)

Rev	Details of Change(s)	Date	Nett Weight Kg (nominal)		Gross Weight Kg (nominal)	
			1.00	1.00	Drawn	Verified
1	For Manufacture	22 August 2017	R.N.	J.L.		



Cathodic Anodes Australasia

cathodicanodes.com.au

Product Zinc Anode		Scale 1 : 1	
Part no. Sealink Zinc Special		Rev 1	Sheet 1 of 1
Drawing No: CD2402			
Drawn by: R Northey Date: 22 AUG 2017			
Mould No: by Customer Tooling: N/A			