


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.  
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.  
 Customer to confirm current revision of drawing prior to ordering.

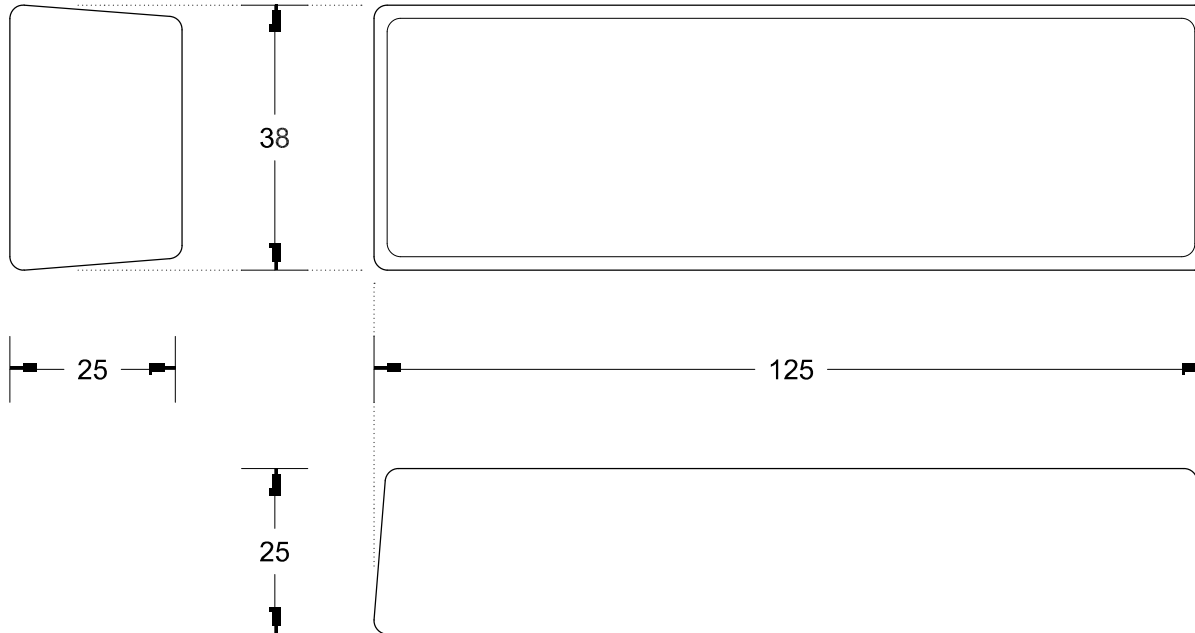

All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy:
Standard: AS2239* <sup>(Most current revision)</sup>			<b>Z1</b>
Element	min.	max.	
Zinc			
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc	remainder		

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	24 JUN 08	B.L.	R.G.
2	2013 Catalogue Version (CAA Logo)	21 DEC 13	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
<b>0.800</b>	<b>0.800</b>

**CAA**  
 Cathodic Anodes Australasia  
 cathodicanodes.com.au

Product <b>Zinc Anode</b>		Scale <b>1 : 1</b>	
Part no. <b>CDZ2-515-1</b>	Rev <b>2</b>	Sheet <b>1 of 1</b>	
Drawing No: <b>CD1019</b>		Mould No: 56	
Drawn by: R Northey Date: 21 DEC 2013			

\* Corresponds to MIL-DTL-18001L alloy composition