


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

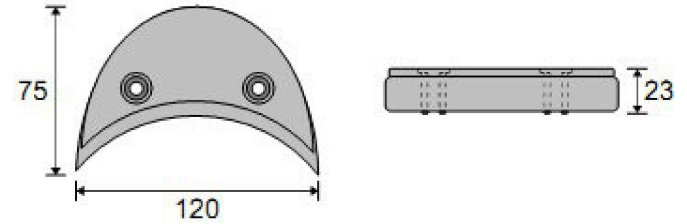

Hole Detail = 2 x 7 Ø Holes @ 63 mm Centres

Outboard Block Aluminium Anode - Medium

OMC / Johnson / Evinrude

Replaces Genuine Part: 392123

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications

All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy: 24779A
Element	min.	max.	
Standard: MIL-DTL-24779A(SH)			
Aluminium (Most current revision)			
Zinc	4.0	6.5	
Indium	0.014	0.020	
Mercury	-	0.001	
Silicon	0.08	0.20	
Iron	-	0.090	
Copper	-	0.004	
Tin	-	0.001	
Aluminium	remainder		

Rev	Details of Change(s)	Date	Nett Weight		Gross Weight	
			Kg (nominal)		Kg (nominal)	
			0.290		0.290	
1	Cathodic Diecasting Original	08 Aug 2011		R.N.		R.G.
2	2013 / 2019 Catalogue Version (CAA Logo)	21 Aug 2020		R.N.		R.G.



Cathodic Anodes Australasia

cathodicanodes.com.au

Product Aluminium Anode			
Part no. CDA9-018		Scale NTS	
Drawing No: CD3088		Rev 2	Sheet 1 of 1
Drawn by: R Northey		Date: 21 AUG 2020	
Mould No: X		Tooling:	

