


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

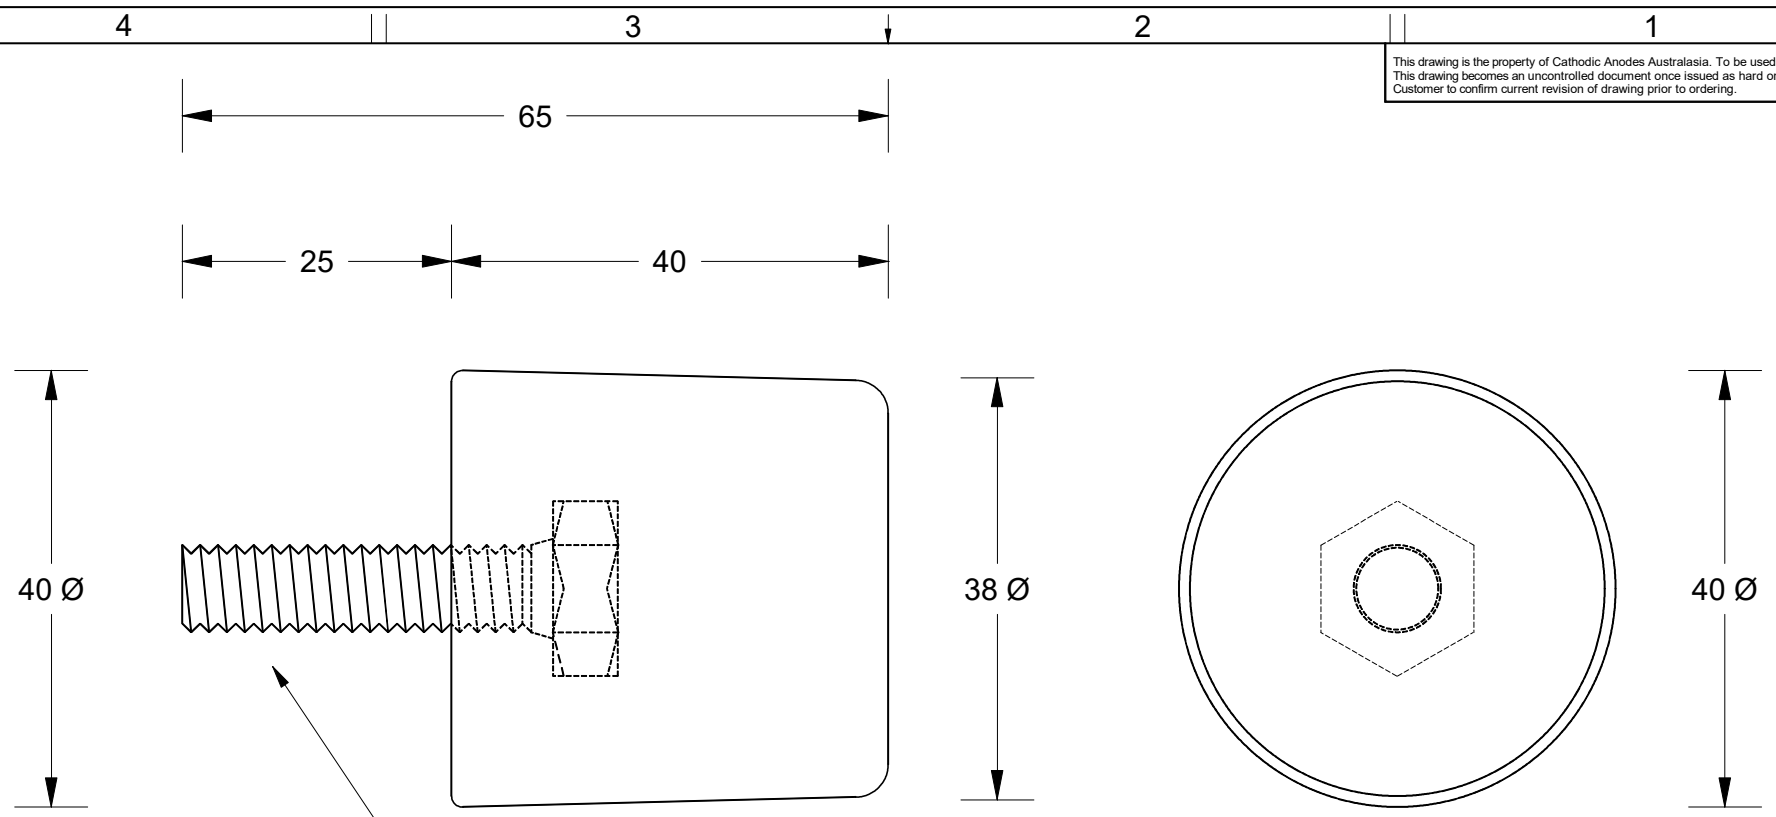

M8 Stainless Steel STUD

Insert = M8 x 35 Stainless Steel Hex Head Set Screw

Chemical Composition Limits			Alloy: Z1
Standard: AS2239* (Most current revision)			
Zinc			
Element	min.	max.	
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc		remainder	

* Corresponds to MIL-DTL-18001L alloy composition

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	For Manufacture	04 July 2019	R.N.	L.S.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
N/A	0.35

CAA
Cathodic Anodes Australasia
cathodicanodes.com.au

Product Zinc Anode		Scale 1.5 : 1	
Part no. CDZ6C-40B Type 3		Rev 1	Sheet 1 of 1
Drawing No: CD2512		Date: 04 JUL 2019	
Drawn by: R Northey		Date: 04 JUL 2019	

All dimensions are in mm (nominal)