


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

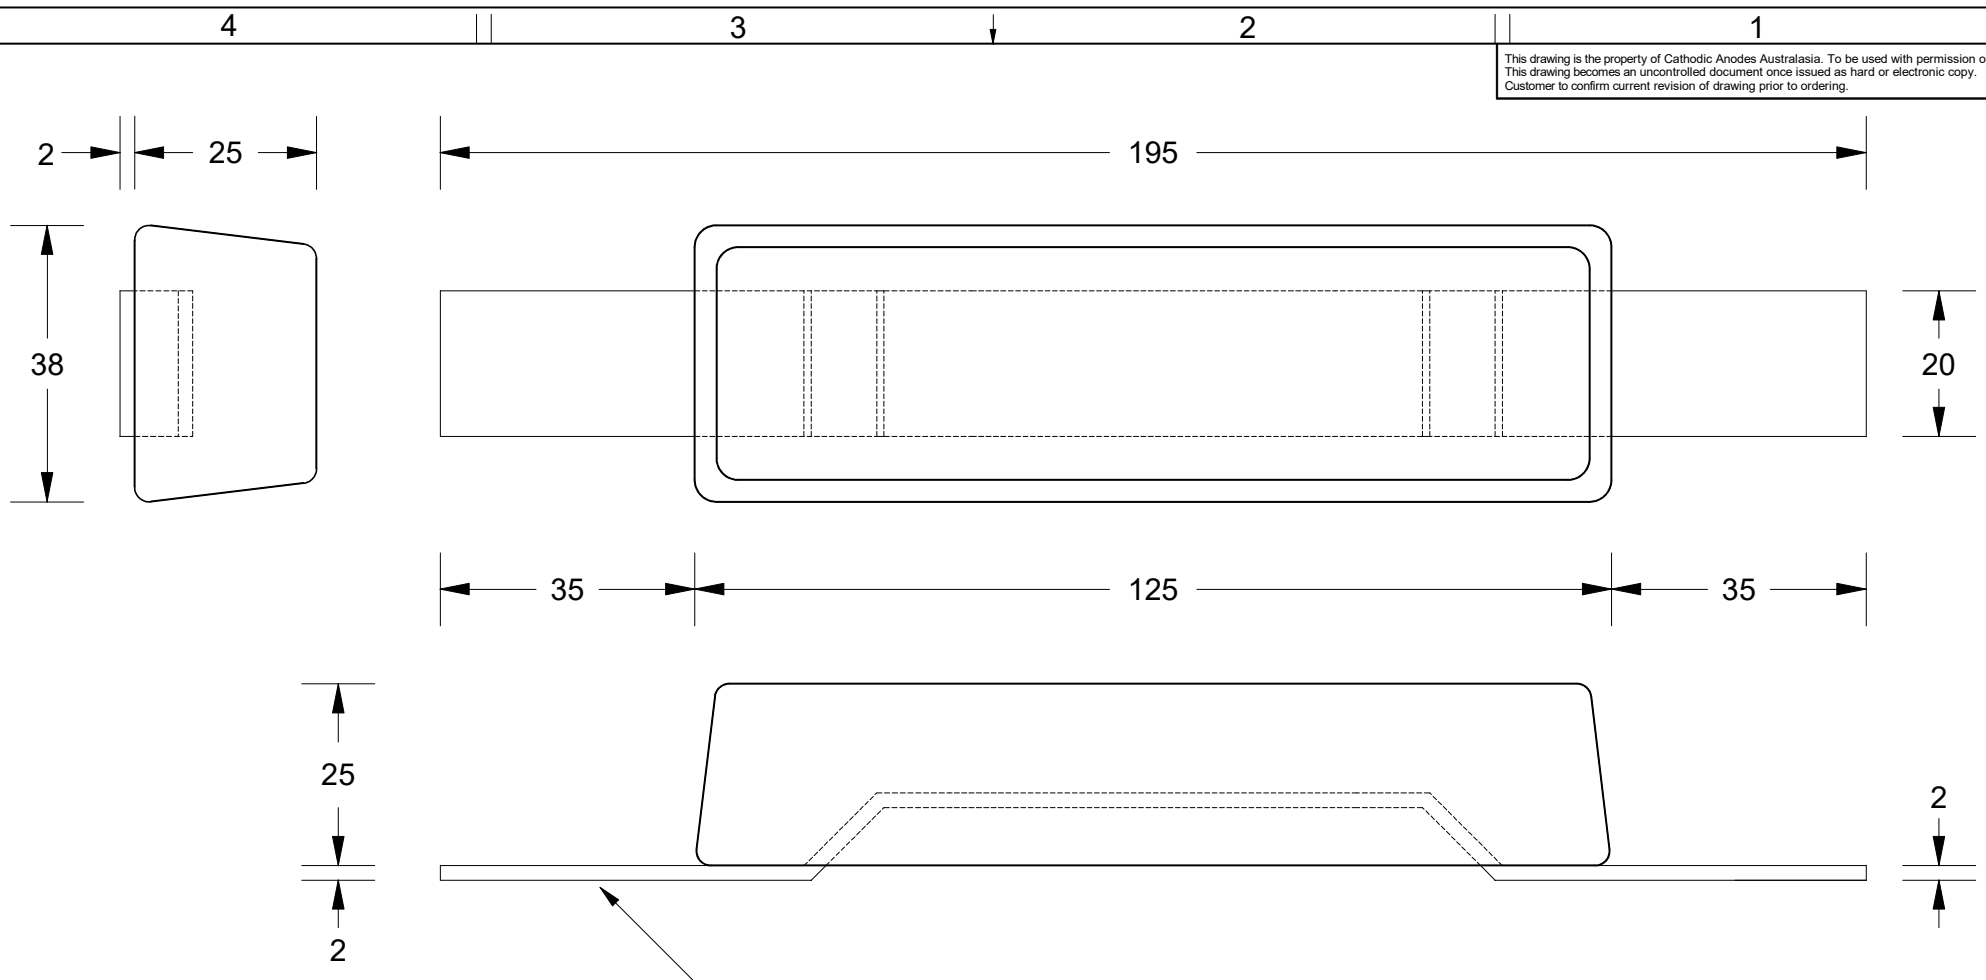

20 x 2 GALVANISED STEEL INSERT STRAP

Chemical Composition Limits			Alloy:
Standard: AS2239* (Most current revision)			Z1
Zinc			
Element	min.	max.	
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc	remainder		

* Corresponds to MIL-DTL-18001L alloy composition

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications



Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
0.800	0.900



Cathodic Anodes Australasia

cathodicanodes.com.au

All dimensions are in mm (nominal)

Rev	Details of Change(s)	Date	Drawn	Verified
1	For Manufacture	13 NOV 13	R.N.	J.L.
2	2013 Catalogue Version	11 DEC 13	R.N.	R.G.

Product		Zinc Anode	
Part no.	CDZ2-515-1S	Scale	1 : 1
Drawing No:	CD3691	Rev	2
Drawn by: R Northey	Date: 13 NOV 2013	Sheet	1 of 1
Mould No: 54	Strap Sample 17		