


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.

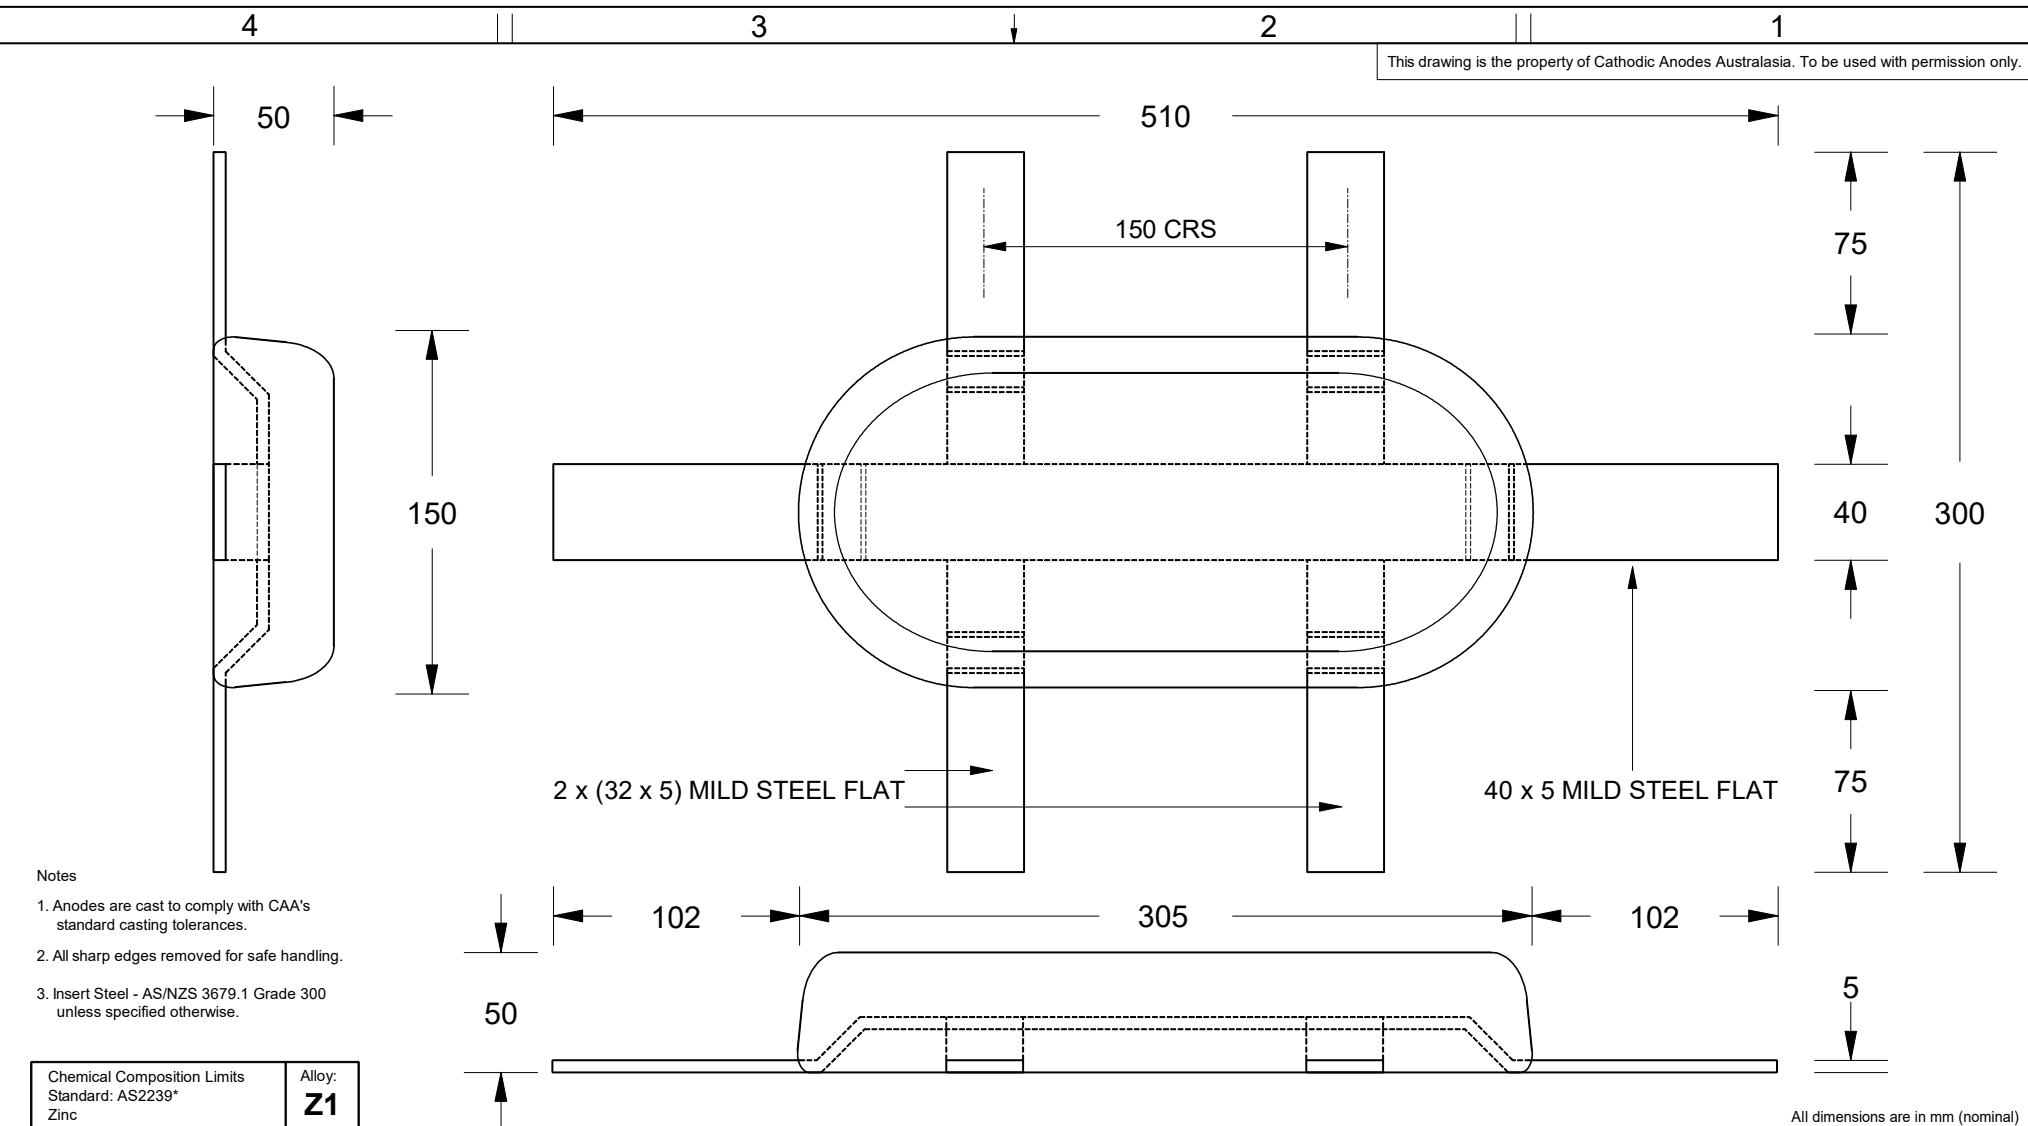

- Notes**
1. Anodes are cast to comply with CAA's standard casting tolerances.
 2. All sharp edges removed for safe handling.
 3. Insert Steel - AS/NZS 3679.1 Grade 300 unless specified otherwise.

Chemical Composition Limits Standard: AS2239*		Alloy: Z1	
Element	Min	Max	
Cadmium	0.025	0.070	
Aluminium	0.10	0.50	
Silicon	—	0.005	
Copper	—	0.005	
Iron	—	0.005	
Lead	—	0.006	
Other Impurities	- Each	0.005	
	- Total	0.02	
Zinc		remainder	

* Corresponds to MIL-A-18001k alloy composition.


All dimensions are in mm (nominal)

		Nett Weight Kg (nominal)	Gross Weight Kg (nominal)	
		12.0	13.5	
Rev	Details of Change(s)	Date	Drawn	Verified
1	For Quotation	25 FEB 15	R.N.	J.L.



Cathodic Anodes Australasia

cathodicanodes.com.au

Product Zinc Anode		Scale 1 : 3	
Part no. CDZ8-12-200S (6 Leg)		Rev 1	Sheet 1 of 1
Drawing No: CD3929			
Drawn by: R Northey Date: 25 FEB 2015		Mould No: 89 (Custom) Strap Sample 04.2 x 02 (Custom)	